


# Product Datasheet

Imagine a series of these, downlit, along the entire length of a wall, coloured in the perfect hue to create both ambience and strong lines. Utilise the option of customising your colour and profile to come up something never seen before!

## PROFILE

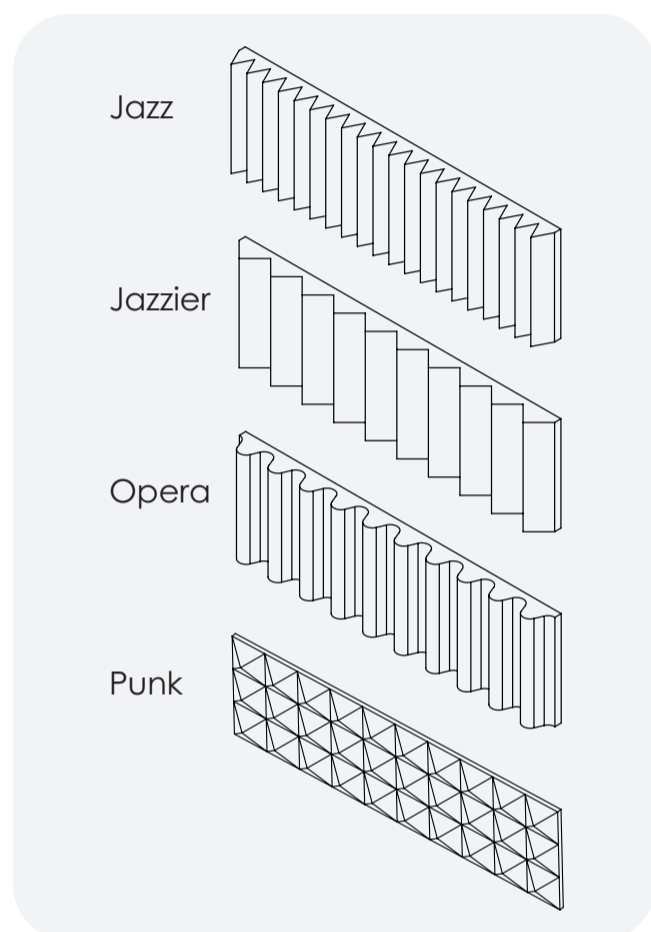

## EXTERNAL COLOURS

Choose from our range or come up with your own PMS colour

## LIGHT DIRECTION

Up & Down  
Up Only  
Down Only  
Absorbent Panel Only (no light)

## LIGHT TEMPERATURE

Warm/Ambient	2900K
Medium	3200K
Daylight	4000K

## CANOPY COLOUR

Black  
White



1000MM WALL LIGHT

VOLTAGE: 24V DC  
INPUT VOLTAGE: 240V  
POWER (WATTS): 23 watts  
DIMMING: Resistance, 0-10V, PWM Signal or DALI  
COLOUR TEMPERATURE: 2900 / 3200 / 4000 K  
(2900K unless otherwise specified)  
LUMENS: 3340 (lm/m)  
UP/DOWN LIGHT COMES AS STANDARD  
(unless specified Up only, Down only or Panel only)  
COLOUR RENDERING INDEX: > 80  
WEIGHT: > 5 kg  
DRIVER RATING: IP67  
Driver Certifications and Information Attached