



DATASHEET & SPECIFYING INFORMATION

PEEK WALL

Absorbs up to 30% of noise

Made in Australia

Global GreenTag: Rate A Certified materials

Low voltage LED - 50,000 hours

STUDIO
ACUSTICO

+61 3 9005 6008
studioacustico.com




Peek Wall Light


Size: 600mm x 600mm x 69mm

Weight: Approx. 2kg


Light output: Wall grazing only

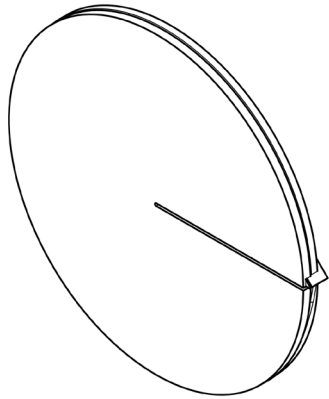

ISOMETRIC VIEW

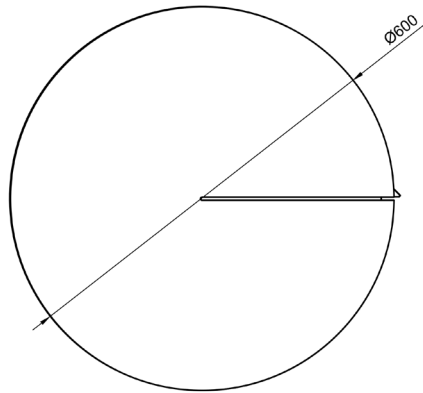

FRONT VIEW

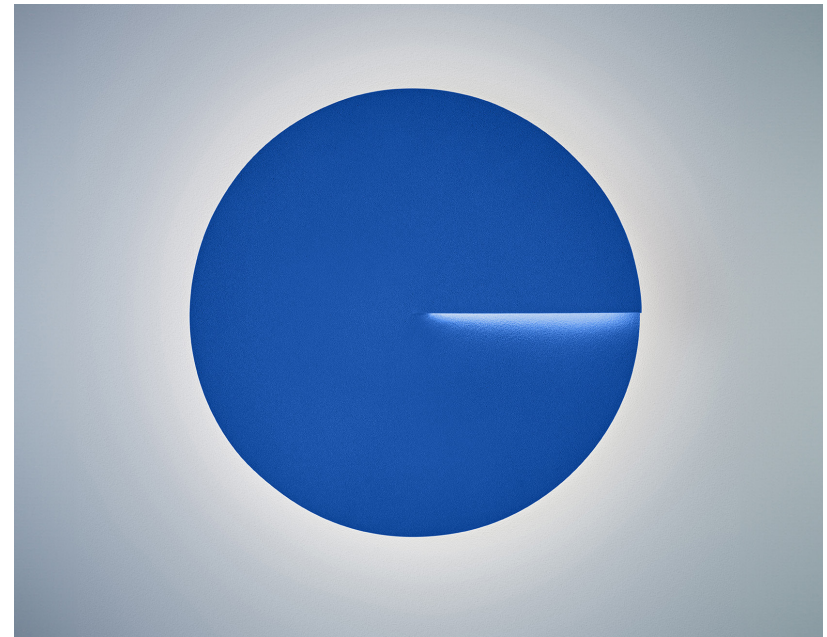

Light as art and great sound absorption.

Colour Range



OB: *Ocean Blue*



SB: *Steel Blue*



LG: *Light Grey*




OG: *Olive Green*




RG: *Rouge*




BO: *Burnt Orange*



MD: *Mustard*



LP: *Loud Pink*



BK: *Black*

Lighting Information


Voltage:	24v dc
Input voltage:	240v
Control Gear:	> 80
Colour rendering index:	> 80
Suspension weight:	> 5 kg
Driver rating:	IP20
Colour temperature:	3000k. Please specify if you need an alternative temp
Mounting:	Wall mounted
Material:	Combustion modified PU foam, metal

SPECIFYING INFORMATION

Projects are complex.

In order to preserve the correct details being passed from one contractor to the next over the course of your project, please use the following information in your schedule to specify our lights.

PROFILE	DRIVER TYPE	COLOUR
<i>Eg. PEEK</i>	<i>Eg. NDA</i>	<i>Eg. SB</i>
PROFILE OPTIONS	DRIVER OPTIONS	COLOUR OPTIONS
PEEK	DA Dali	OG Olive Green
	NDA Fixed Output	OB Ocean Blue
		LG Light Grey
		SB Steel Blue
		RG Rouge
		MD Mustard
		BO Burnt Orange
		LP Loud Pink
		BLK Black

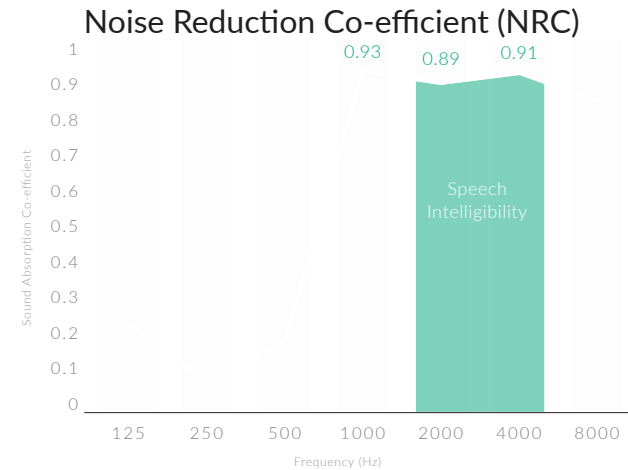

Results: Reverberation Times, Acoustic Performance and Absorption Co-efficient

Frequency (Hz)	23/10/2019 Measured Reverberation Time (seconds)	06/11/2019 Measured Reverberation Time (seconds)	Difference in acoustic performance (m ² Sabin)	Calculated absorption coefficient: of tested light fittings
125	0.93	0.78	1.4	0.24
250	0.78	0.74	0.4	0.07
500	0.55	0.49	1.0	0.17
1k	0.60	0.40	5.4	0.93
2k	0.57	0.40	5.2	0.89
4k	0.60	0.47	5.3	0.91
8k	0.47	0.34	4.9	0.85

For additional information on acoustic testing please visit the Sound Lab on our website or request full testing reports.

END-OF-LIFE MANAGEMENT PROGRAM

We ask that products are returned to Acustico Lighting.
We have agreements in place with our suppliers who commit to upcycling approximately 80% of the materials.

SUSPENSION

Our lights have optimum sound absorbency of voice noise when they are hung at 2000mm or lower from FFL. Please consider this when specifying the hanging height. Our standard hanging length is 1000mm and can be altered to the appropriate length on-site.

If you require longer length, please specify your required custom length.

All Acustico Lighting pieces must be installed by a licensed electrician in accordance with AS/NZS 3000 or equivalent standard in country of installation.

WARRANTY

3 years manufacturer's warranty when subject to normal use and care in an appropriate location.

Full warranty available at studioacustico.com.au

All of our products are individually assembled meaning minor variations in finish, colour and profile can occur. Slight variations are to be expected and will not be accepted as a fault or defect in the product. Colours and finishes as viewed on printed and digital sources are representative only and may not appear identical to the finished product. Acustico Lighting reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © Sept 2024